

HIGHLANDER® AR & HIGHLANDER®



LAMINATE SHINGLES



SCOTCHGARD™ PROTECTION FROM 3M

Algae growth on a roof can cause black streaks, which can alter the color of your roof and make it appear aged. Shingles with Scotchgard™ Protector help maintain the aesthetic appearance of your roof by resisting black streaks caused by algae, which may reduce the need to clean your roof. Shingles with Scotchgard™ Protector include a 20-year warranty.



ALGAE RESISTANT

Algae growth can cause black stains, which can alter the color of your roof and make it appear aged. Highlander® AR shingles help to keep your roof looking cleaner for longer and includes a 10-year warranty.



DOUBLE RAIN SEAL PROTECTION

A rain seal helps hold shingles in place during high winds and protects against wind-blown rain entering beneath the shingles. Malarkey laminate shingles are manufactured with an extra line of defense in the critical area for laminated shingles, with double SEBS asphalt rain seals. Malarkey's SEBS asphalt has adhesive properties to join the shingle together and cohesive properties to prevent it from separating. SEBS is also flexible down to 0°F (-18°C), ensuring the rain seal remains intact through freeze and thaw cycles.



SUPERIOR GRANULAR EMBEDMENT

Malarkey's quality control combined with exceptional materials ensures superior granule adhesion and durability to protect your investment.



THE ZONE®

One of the most critical aspects of a successful roofing project is correct installation. Improper fastener placement is the leading cause of incorrect shingle installation and can subsequently void the warranty. Malarkey laminate shingles are manufactured with The Zone® patented nailing area, which is over three times larger than other laminate shingles and dramatically improves correct fastener placement.



LIMITED WIND WARRANTY

Highlander® AR and Highlander® featuring Scotchgard™ shingles come with a 110 mph (177 kph) Limited Wind Warranty.



ENHANCED WIND WARRANTY

Highlander® AR and Highlander® featuring Scotchgard™ shingles are eligible for a 130 mph (209 kph) Enhanced Wind Warranty when Malarkey's Smart Start™ shingles are installed, shingles are 6-nailed, and one or more of Malarkey's supporting products – Arctic Seal®, Right Start™ UDL, SecureStart™, EZ-Ridge™ (8", 10") or Hip & Ridge Strips (10", 12") – are used.



TESTING, APPROVALS, & WARRANTY

- ASTM D7158 Class H
- ASTM D3161 Class F
- ASTM E108 Class A Fire Rating
- ICC Approval – ESR 3150
- 10-year Right Start™ Warranty
- LIMITED LIFETIME WARRANTY available.
- ASTM D3462
- ASTM D3018 Type I
- CSA A123.5
- FBC Approval – #14809

For more information, visit: WWW.MALARKEYROOFING.COM

*Highlander® with Scotchgard™ and Legacy® with Scotchgard™ features the 20-year Scotchgard™ Algae Resistant Shingle Protector warranty from 3M. Highlander® AR features the 10-year Algae Resistant System warranty from Malarkey. Both the Scotchgard™ and Malarkey algae resistant warranties require algae resistant EZ-Ridge™ (8", 10") or Hip & Ridge Strips (10", 12"), in conjunction with algae resistant shingles, to receive their respective algae resistant warranties. The Alaskan® featuring Scotchgard™ can be substituted as hip and ridge shingles for both the Scotchgard Algae Resistant Shingle Protector warranty from 3M and the Algae Resistant System warranty from Malarkey. Dura-Seal™ AR can be substituted as hip and ridge shingles for the Algae Resistant System from Malarkey. Scotchgard and the Scotchgard logo, including the plaid design and 3M logo, are all trademarks of 3M. †For complete Limited Lifetime warranty details, reference Malarkey's Limited Lifetime Shingle Warranty. **Some contractors adapt roofing shingles to use as hip and ridge shingles. Use of The Alaskan® as a hip and ridge shingle will apply towards the Enhanced Wind Warranty. Dura-Seal™ shingles used for hip and ridge will not qualify toward an Enhanced Wind Warranty. ‡ENERGY STAR only applies to Highlander® Dove White shingles. ENERGY STAR is only recognized in the United States, not in Canada.

Shown in:
Natural Wood

EZ-RIDGE™ 8" & EZ-RIDGE XT™ 10" HIGH PROFILE



SUPERIOR DESIGN

Malarkey's EZ-Ridge™ shingles with Flexor™ SBS polymer modified asphalt offer a decorative ridge design with an elevated profile, while maintaining a simple installation process. EZ-Ridge™ is available in 8" and 10" widths to support an array of ridge vents. Malarkey's EZ-Ridge™ is blended to compliment the roof shingles and feature the Scotchgard™ Algae Resistant Shingle Protector from 3M.



SCOTCHGARD™ PROTECTION FROM 3M

Algae growth on a roof can cause black streaks, which can alter the color of your roof and make it appear aged. Shingles with Scotchgard™ Protector help maintain the aesthetic appearance of your roof by resisting black streaks caused by algae, which may reduce the need to clean your roof. Shingles with Scotchgard™ Protector include a 20-year warranty.



FLEXOR™ SBS POLYMER MODIFIED ASPHALT

Flexor™ SBS polymer modified asphalt increases the weatherability of shingles through superior granule adhesion and all-weather flexibility. Malarkey blends their Flexor™ SBS polymer modified asphalt at each of their facilities to maintain and control high quality standards.

EZ-Ridge™ and EZ-Ridge™ XT shingles are designed to highlight certain hues in the Malarkey shingles and may not always appear to be an exact match to the entire blend of the roof.

EZ-Ridge shown in:
Black Oak

HIP & RIDGE 10" & 12" STRIPS



EXCEPTIONAL PERFORMANCE

Malarkey's Hip & Ridge Strips with Flexor™ SBS polymer modified asphalt respond to the demands of a high performance hip and ridge cap for all shingled roofs and are available in 10" and 12" widths to support an array of ridge vents. The perforated strips provide easy installation and a low profile design for a traditional appearance. Malarkey's Hip & Ridge Strips are blended to compliment the shingles and feature the Scotchgard™ Algae Resistant Shingle Protector from 3M.



SCOTCHGARD™ PROTECTION FROM 3M

Algae growth on a roof can cause black streaks, which can alter the color of your roof and make it appear aged. Shingles with Scotchgard™ Protector help maintain the aesthetic appearance of your roof by resisting black streaks caused by algae, which may reduce the need to clean your roof. Shingles with Scotchgard™ Protector include a 20-year warranty.



FLEXOR™ SBS POLYMER MODIFIED ASPHALT

Flexor™ SBS polymer modified asphalt increases the weatherability of shingles through superior granule adhesion and all-weather flexibility. Malarkey blends their Flexor™ SBS polymer modified asphalt at each of their facilities to maintain and control high quality standards.



EXTREME WEATHER PROTECTION

Malarkey's Flexor™ SBS polymer modified asphalt shingles received the UL 2218 Class 4 impact resistance rating, which is the highest rating possible. In a Class 4 impact test, Malarkey's Flexor™ SBS polymer modified shingles withstood a simulation of hailstones impacting a roof at 90 mph (144 kph) without sustaining damage.

Hip & Ridge Strips are designed to highlight certain hues in the Malarkey shingles and may not always appear to be an exact match to the entire blend of the roof.

Hip & Ridge Strips shown in:
Natural Wood



Malarkey Roofing Products®
P.O. Box 17217
Portland, Oregon 97217
WWW.MALARKEYROOFING.COM
(800) 545-1191 • F AX: (503) 289-7644

This version supersedes all previous versions. Rev. 2/15



LAMINATED ARCHITECTURAL SHINGLES

Shown in:
Heather

WWW.MALARKEYROOFING.COM

Distributed From:

OK

LEGACY® & LEGACY®

LAMINATE SHINGLES



SCOTCHGARD™ PROTECTION FROM 3M

Algae growth on a roof can cause black streaks, which can alter the color of your roof and make it appear aged. Shingles with Scotchgard™ Protector help maintain the aesthetic appearance of your roof by resisting black streaks caused by algae, which may reduce the need to clean your roof. Shingles with Scotchgard™ Protector include a 20-year warranty.



DOUBLE RAIN SEAL PROTECTION

A rain seal helps hold shingles in place during high winds and protects against wind-blown rain entering beneath the shingles. Malarkey laminate shingles are manufactured with an extra line of defense in the critical area for laminated shingles, with double SEBS asphalt rain seals. Malarkey's SEBS asphalt has adhesive properties to join the shingle together and cohesive properties to prevent it from separating. SEBS is also flexible down to 0°F (-18°C), ensuring the rain seal remains intact through freeze and thaw cycles.



FLEXOR™ SBS POLYMER MODIFIED ASPHALT

Flexor™ SBS polymer modified asphalt increases the weatherability of shingles through superior granule adhesion and all-weather flexibility. Malarkey blends their Flexor™ SBS polymer modified asphalt at each of their facilities to maintain and control high quality standards.



EXTREME WEATHER PROTECTION

Malarkey's Flexor™ SBS polymer modified asphalt shingles received the UL 2218 Class 4 impact resistance rating, which is the highest rating possible. In a Class 4 impact test, Malarkey's Flexor™ SBS polymer modified shingles withstood a simulation of hailstones impacting a roof at 90 mph (144 kph) without sustaining damage.



SUPERIOR GRANULAR EMBEDMENT

Flexor™ SBS polymer modified asphalt is resilient through temperature cycles, providing greater granule adhesion to the shingle. When granules stay on the shingle, it creates a barrier from the elements and your roof lasts longer.



ALL-WEATHER FLEXIBILITY

Flexor™ SBS polymer modified asphalt ensures that shingles are flexible in temperatures down to 0°F (-18°C), which is 40 degrees lower than the typical installation of standard asphalt. This cold weather flexibility allows the shingle to be installed in colder temperatures than standard oxidized asphalt shingles without damage to the shingle. Flexor™ allows the shingle to conform to a variety of roof structures, withstand extreme weather cycles, and be installed in a wider range of climates.



THE ZONE®

One of the most critical aspects of a successful roofing project is correct installation. Improper fastener placement is the leading cause of incorrect shingle installation and can subsequently void the warranty. Malarkey laminate shingles are manufactured with The Zone® patented nailing area, which is over three times larger than other laminate shingles and dramatically improves correct fastener placement.



LIMITED WIND WARRANTY

Legacy® and Legacy® featuring Scotchgard™ shingles come with a 110 mph (177 kph) Limited Wind Warranty.



ENHANCED WIND WARRANTY

Legacy® and Legacy® featuring Scotchgard™ shingles are eligible for a 130 mph (209 kph) Enhanced Wind Warranty when Malarkey's Smart Start™ shingles are installed, shingles are 6-nailed, and one or more of Malarkey's supporting products – Arctic Seal®, Right Start™ UDL, SecureStart™, EZ-Ridge™ (8", 10") or Hip & Ridge Strips (10", 12") – are used.



TESTING, APPROVALS, & WARRANTY





- ASTM D7158 Class H
- ASTM D3161 Class F
- ASTM E108 Class A Fire Rating
- CSA A123.5
- FBC Approval – #14809
- 15-year Right Start™ Warranty
- LIMITED LIFETIME WARRANTY available.

For more information, visit: WWW.MALARKEYROOFING.COM



Shown in:
Heather

AVAILABLE COLORS

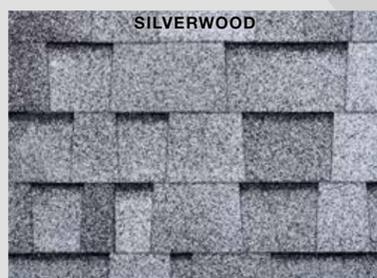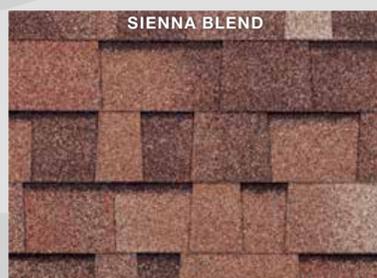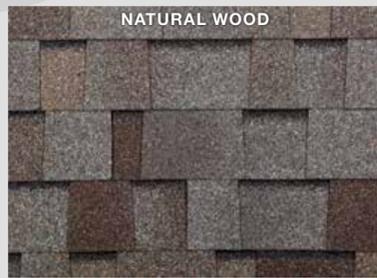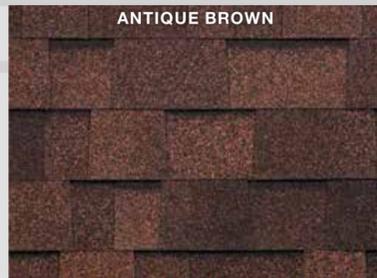

DISCLAIMER: Sample pieces or photographs of shingles may not accurately represent the true color or variations of color blends that will appear on the roof. Before installation, five or six shingles should be laid out and reviewed for conformity to desired color level. If color levels are unsatisfactory, advise your dealer before proceeding with installation. Colors and specifications subject to change without notice. Shingle colors not available in all regions. Limited warranties carry terms and conditions. Please contact your local Malarkey representative for color availability and further information. See Malarkey Shingle Warranty for details.

HIGHLANDER®

LAMINATE SHINGLES



DOUBLE RAIN SEAL PROTECTION

A rain seal helps hold shingles in place during high winds and protects against wind-blown rain entering beneath the shingles. Malarkey laminate shingles are manufactured with an extra line of defense in the critical area for laminated shingles, with double SEBS asphalt rain seals. Malarkey's SEBS asphalt has adhesive properties to join the shingle together and cohesive properties to prevent it from separating. SEBS is also flexible down to 0°F (-18°C), ensuring the rain seal remains intact through freeze and thaw cycles.



SUPERIOR GRANULAR EMBEDMENT

Malarkey's quality control combined with exceptional materials ensures superior granule adhesion and durability to protect your investment.



SOLAR REFLECTIVE SHINGLES

Dove White shingles reflect solar rays, which may reduce the amount of heat entering your home and can result in lower attic temperatures compared to standard shingle colors.



THE ZONE®

One of the most critical aspects of a successful roofing project is correct installation. Improper fastener placement is the leading cause of incorrect shingle installation and can subsequently void the warranty. Malarkey laminate shingles are manufactured with The Zone® patented nailing area, which is over three times larger than other laminate shingles and dramatically improves correct fastener placement.



LIMITED WIND WARRANTY

Highlander® shingles come with a 110 mph (177 kph) Limited Wind Warranty.



ENHANCED WIND WARRANTY

Highlander® shingles are eligible for a 130 mph (209 kph) Enhanced Wind Warranty when Malarkey's Smart Start™ shingles are installed, shingles are 6-nailed, and one or more of Malarkey's supporting products – Arctic Seal®, Right Start™ UDL, SecureStart™, EZ-Ridge™ (8", 10") or Hip & Ridge Strips (10", 12") – are used.



TESTING, APPROVALS, & WARRANTY

- ASTM D7158 Class H
- ASTM D3161 Class F
- ASTM E108 Class A Fire Rating
- ICC Approval – ESR 3150
- 10-year Right Start™ Warranty
- LIMITED LIFETIME WARRANTY available.
- ASTM D3462
- ASTM D3018 Type I
- CSA A123.5
- FBC Approval – #14809

For more information, visit: WWW.MALARKEYROOFING.COM



Shown in:
Antique Brown

COLOR AVAILABILITY

	Antique Brown	Black Oak	Dove White	Heather	Midnight Black	Natural Wood	Oxford Grey	Rainforest	Rustic Slate	Sienna Blend	Silverwood	Storm Grey	Weathered Wood
Legacy®	●	●	●	●	●	●	●	●	●	●	●	●	●
Legacy®	●	●	●	●	●	●	●	●	●	●	●	●	●
Highlander®	●	●	●	●	●	●	●	●	●	●	●	●	●
Highlander® AR	●	●	●	●	●	●	●	●	●	●	●	●	●
Highlander®	●	●	●	●	●	●	●	●	●	●	●	●	●

Distributed from: ● Oklahoma City, OK